

The logo for AXPAN, featuring the brand name in a bold, black, sans-serif font. A red, curved swoosh element is positioned above the letters 'A', 'X', and 'P', extending from the top of the 'A' to the top of the 'P'.

AXPAN



Our knowledge and experience at your service

AX36 PRO



Save Time and Money

Why do the work by hand? The AX36 PRO is a micro mini digger capable of most landscaping tasks. Its size enables easy access and transport. With an affordable purchase cost and low maintenance, the AX36 PRO will save you and your business time and money





A comprehensive range of attachment for all applications!

The AX36 PRO will:

- Dig trenches and large holes up to a depth of 1.20m (4') with its digging buckets of 20 and 30 cm (8" & 12")
- Clean ditches, grade, level and load with its 60 cm bucket (24")
- Loosen compacted soil and pull out roots with its ripper tooth
- Drill and bore holes with its selection of auger drives
- Lift and move large stones, logs and other objects with its grapple



Costs saving

- Work faster with less labour
- Very competitive purchase price enables saving on hire costs
- No additional transport costs with an operating weight of less than 600kg (1,300 lbs) and compact dimensions. The AX36 PRO can be transported in a light trailer, in the back of a van or in a pick-up truck


Affordable running costs

- Only selected reliable hydraulic components used
- Strongly built and constructed to industrial standards

The logo for AXPAN, featuring the brand name in a bold, black, sans-serif font with a red swoosh underline.


AX36 PRO

Small but powerful!

- 
- A red and black mini excavator with a tracked base, positioned in a grassy field. The excavator's arm is extended to the right, and its bucket is lowered. In the background, there is a wooden fence and a large wooden building.
- **Bucket pulling force 800kg**
 - **Maximum digging depth: 120cm (4')**
 - **Improved work efficiency with precise and powerful moves**

Compact & manoeuvrable

- Narrow width and on the spot skid steer for tight access
- Compact size for easy transport and storage
- Improved ground clearance for difficult terrain
- 360 rotation + boom articulation 60 degrees left and right
- Big track footprint and dozer blade supports for stability

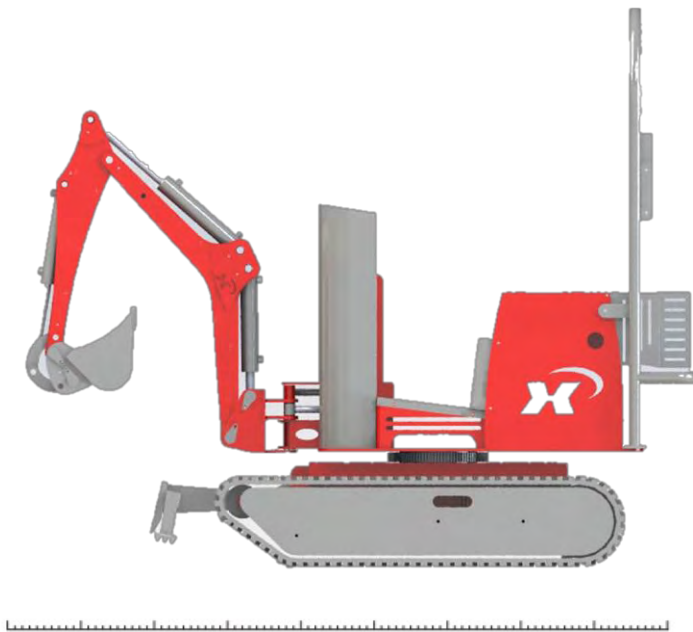

2400mm (7'9")



760mm (2'5")

Accessories

The AX36 PRO is also available with a 14hp engine and upgraded hydraulic system (recommended for intensive use). Thermostatic oil cooling system as standard on all machine. Electric start, lights (orange flashing and work lights) and reversing audible alarm.



20cm Bucket (8")

Trenching bucket with teeth



30cm Bucket (12")

General purpose bucket with teeth



60cm Bucket (24")

Grading or ditching bucket without teeth. Can be mounted facing forward for scooping up



Ripper Tooth

For compacted soil, shallow narrow tranches, pulling out roots, etc...



Auger Drive


Direct drive, self-plumbing auger unit with high torque motor for auger bits 100, 150 and 200mm (4", 6" and 8")



Grapple

Log grabber, also for stones and large objects

Technical Data

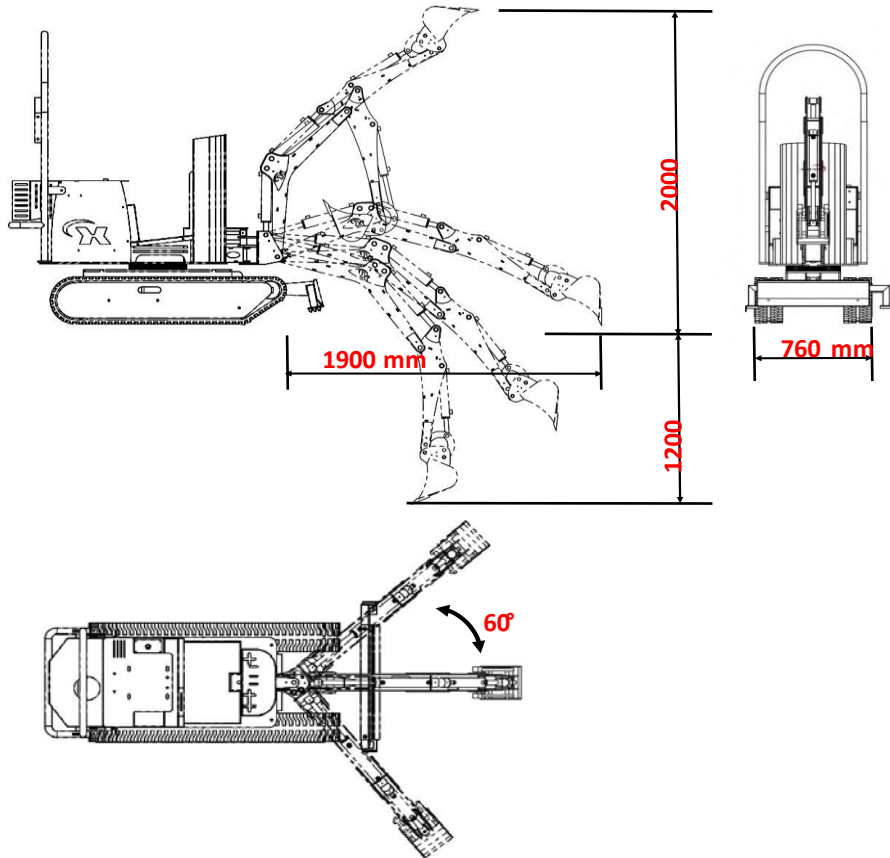

| | | |
|--------------------------|-----------------------------|----------|
| Operating weight | 595kg | 1,312lbs |
| Overall length | 2,513mm | 99inch |
| Total height | 1,950mm | 77inch |
| Height with ROPS folded | 1,420mm | 56inch |
| Width | 760mm | 30inch |
| Track width | 180/200mm | 7/8inch |
| Footprint | 1,200mm | 47inch |
| Ground clearance | 180mm | 7inch |
| Maximum digging depth | 1,200mm | 47inch |
| Bucket digging force | 800daN | 1,800lbf |
| Maximum lifting capacity | 100kg | 220lbs |
| Maximum travel speed | 2km/h | 1.25mph |
| Boom slew angle | 120° (60° right + 60° left) | |

Engine Specifications

Kohler Command Pro CH395 or CH440 (recommended)

| | | |
|------------------------|---------------------------|------------------------------|
| Gross Power @ 3,600rpm | 9.5hp or 14hp | 7.1kW or 10.4kW |
| Displacement | 277 or 429cm ³ | 16.9 or 24.7in. ³ |
| Engine weight | 27.8kg or 33kg | 61.5lbs or 72.8lbs |
| Oil capacity | 1.1L | 1.05 USqt |
| Fuel tank | 7.3L | 7.4 USqt |

Hydraulic System

Italian twin gear pump gr1 upgraded for 14hp option, cooling radiator

| | | |
|----------------------------|----------------|-------------------------------|
| Displacement | 3.2cc + 3.2cc | 0.19in. ³ per pump |
| Flow rate @ 1,700rpm | 4.8 + 4.8L/min | 1.05 USgal/min/pump |
| Maximum operating pressure | 130 bars | 1,885psi |
| Reservoir capacity | 16L | 4.22 USgal |

SAFETY FIRST

- Foldable ROPS
- Seat belt
- Orange flashing beacon
- Reversing beeper
- Cut off key switch
- LED work light and horn